


**NEW
JOBPOWER!**

ALLIED'S MODEL 250 HO-RAM[®] BOOM-MOUNTED PNEUMATIC IMPACT HAMMER

FOR CONSTRUCTION, QUARRIES, MINES AND INDUSTRY.

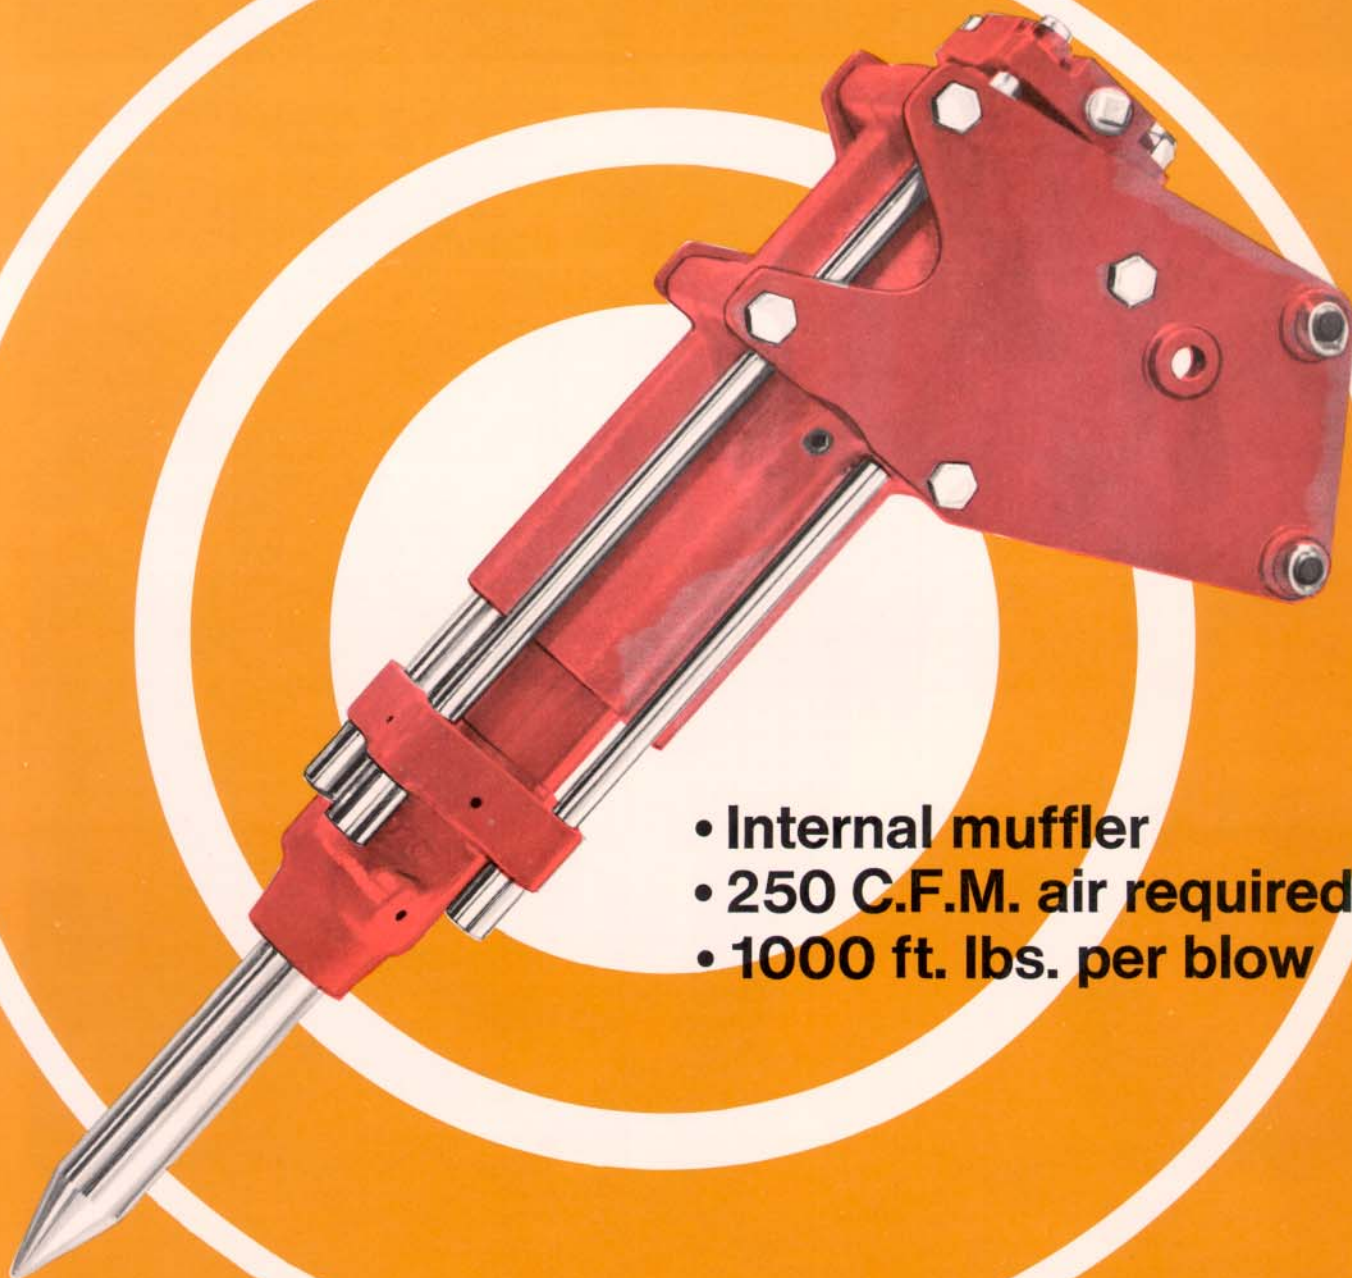

- Internal muffler
- 250 C.F.M. air required
- 1000 ft. lbs. per blow



250 HO-RAM[®]

Boom-Mounted Pneumatic Impact Hammer

SPECIFICATIONS

	U.S.A.	METRIC
Blows per minute	450	450
Impact energy per blow	1000 ft. lbs.	138 m kg
Impact energy per minute	450,000 ft. lbs.	62,100 m kg
Recommended minimum compressor size	250 C.F.M.	7 cu. m
Air hose size	1½ inches	40 mm
Internal muffler (patent applied for)	Standard	Standard
Automatic shut-off (In any position)	Standard	Standard
Tool rotation feature (with Chisel point tool)	Standard	Standard
Gross weight (With standard mounting bracket)	950 lbs.	431 kg
Gross weight (With side angle positioner)	1270 lbs.	576 kg
Overall Length	71 inches	180 cm
Spacing inside mounting bracket	10¼ inches	26 cm
Boom pins	1½ inches	38.1 mm
Standard demolition tool	Conical	Conical
Working length	18 inches	457 mm
Tool diameter	3½ inches	89 mm

NOTE: Ho-Ram comes with boom mounting pins, inlet fitting, standard demolition tool and the lubricator.

ACCESSORIES

Side angle positioner.

Demolition tools —

Bell, Frost Cutter, Blunt Chisel and Conical points are available.

Steel sheeting attachment.

Timber sheeting attachment.

Special mounting brackets for oversize or unconventional booms
or dipper connections are available.

Sold and Serviced by:



STEEL & TRACTOR PRODUCTS, INC.
5800 HARPER ROAD, SOLON, OHIO 44139
(216) 248-2600 Cable: ALTRAC Telex: 980192